



# MS AXII SERIES

HIGH ACCURACY  
MEASURING STATION







## High Accuracy Measuring Station

- Precise angle accuracies 0.5" (MS05AXII) and 1" (MS1AXII)
- Auto-aiming accuracy of 1"
- Remote control through on-line PC
- Exclusive matrix detection technology
- Enforced durability for long term deformation and monitoring applications

### Rapid 2D Monitoring®

In addition to natural hazards, engineering structures, such as buildings, dams, tunnels and bridges can always be affected by movement caused by excavation, heavy construction and piling placement. The MS Series provides superior precision and is equipped with environmental protection and functions necessary in monitoring applications.

### Industrial measurement


The MS05 AXII, when using reflective sheet targets, can achieve sub-millimeter accuracy allowing for measuring the shape and alignment of large-scale structures such as plants and bridges, as well as precise measurements of ships, railroad cars, and airplanes.

### First-order survey

The MS Series offers high-precision angle accuracy (MS05 AXII: 0.5", MS1 AXII: 1") which can be used for a wide range of precise measurements. Equipped with an automatic tracking system, the high-precision robotic measuring station can be configured with a remote control system.

### Advanced auto-pointing for multiple prisms

Incorporating an advanced auto-pointing algorithm\*, optimized for monitoring applications, the instrument automatically sights the prism closest to the telescope center regardless of the distance from the instrument. This works even if multiple prisms or other reflective objects are in the field of view and enhances the reliability in periodic monitoring of predetermined prism locations.

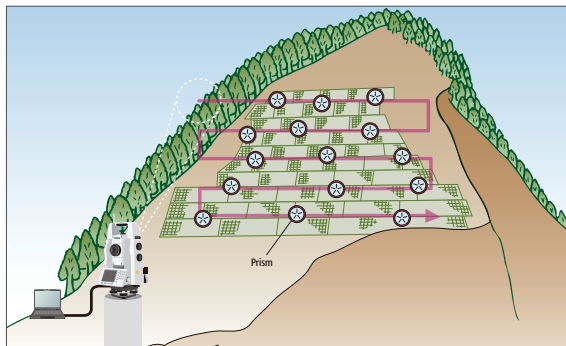

### Matrix detection

The MS Series automatically searches within the predetermined area to quickly measure the prisms as initial positions for subsequent routine measurements. This function works in low light or dark conditions where the reflectors cannot be clearly seen by the human eye.



Advanced angle accuracy

LongLink™  
communications

30x magnification

IP65 dust and water rating

Li-ion rechargeable  
camcorder style battery

Horizontal and  
vertical tangents

Windows® CE

Illuminated keyboard

Large TFT LCD

RS-232 and power ports




MS05AXII		MS1AXII
<b>Angle Measurement</b>		
Accuracy (ISO 17123-3)	0.5" (0.15 mgon)	1" (0.3 mgon)
Minimum Reading	0.1" / 0.5" (0.02 / 0.1 mgon)	
<b>Distance Measurement</b>		
Maximum Range		
Non-prism	100 m	400 m
Reflective Sheet	200 m	200 m
1 Prism	3,500 m	3,500 m
Accuracy (ISO 17123-4)		
Non-prism	1 mm + 1 ppm	2 mm + 1 ppm*
Reflective Sheet	0.5 mm + 1 ppm	1 mm + 1 ppm
1 Prism	0.8 mm + 1 ppm	1 mm + 1 ppm
Motors	DC motordrive	
Rotation Speed	85° / second	
<b>Auto-Collimation</b>		
Range		
AP Prism	1.3 m to 1,000 m	
Reflective Sheet	5 m to 50 m	
Accuracy**		
AP Prism	1" (0.3 mgon) (1 mm at 200 m)	
Reflective Sheet	1 mm at 50 m	
* Up to 200 m range.		
**Auto-collimation accuracy is verified using the methods specified by ISO 17123-3.		




### Ultra high-precision distance measurement

Using reflective sheet targets, the MS05 AXII provides sub-millimeter accuracy (0.5 mm + 1 ppm) in a range of up to 200 m. The MS1 AXII is doubled to 400 m with Kodak white side (90% reflective).



### Advanced angle calibration

Topcon advanced angle encoder technology with exclusive calibration system provides "best in class" angle accuracy, 0.5" (MS05 AXII) and 1" (MS1 AXII).

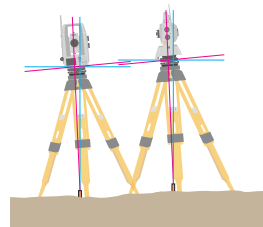

### Adjusting mechanism for angle measuring

The biaxial level compensation mechanism has a wider adjusting range of ±6' which is twice as wide, compared with previous models. This enables highly accurate measuring performance.

### Kit components

- MS Measuring Station
- 2x Batteries and charger
- Lens cap and hood
- Tool kit
- Plumb bob
- Digital manual
- Vinyl cover
- Carry case and straps



### Superior auto-pointing accuracy

The auto-pointing accuracy\* with the standard prism is 1" (1 mm at 200 m), and 4" (1 mm at 50 m) with a reflective sheet.

\* Auto-pointing accuracy is verified using the methods specified by ISO 17123-3.



For more information:  
[topconpositioning.com/ms-series](http://topconpositioning.com/ms-series)

Specifications subject to change without notice.  
 ©2016 Topcon Corporation All rights reserved.  
 T547EN E 6/16

